


MPS-2150

Multimode, Inline Optical Attenuator

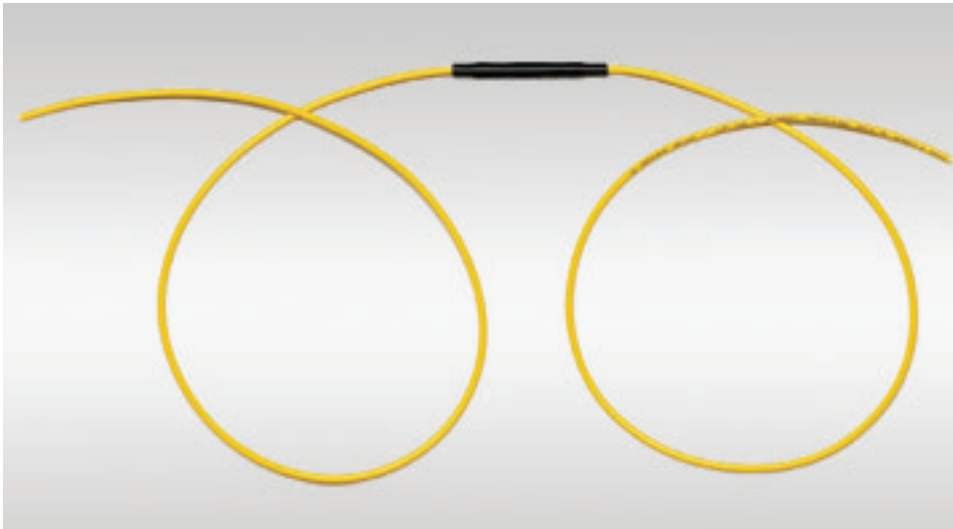

Utilizes Corning singlemode SMF-28 fiber and can be configured with various cable jacketing diameters

The MPS-2150 Multimode In-line Optical Attenuator is a "fixed value" attenuator that is integrated into a standard fiber optic jumper cable. The MPS-2150 utilizes Corning singlemode SMF-28 fiber and can be configured with various cable jacketing diameters. The In-Line Attenuators are available in either single window or dual window configurations with attenuation values up to 40 dB in 1 dB increments. The attenuators are available in fiber diameters of 250 micron, 900 micron, 2mm or 3mm and come integrated into any length jumper. It can be supplied with or without connectors, or as a pigtail version. In addition, each terminated attenuator assembly meets Telcordia standards and is tested for insertion and return loss.

Information: Call us toll-free at 888-868-8967 or email info@b2bphotonics.com

Applications

- Optical Sensors
- High Speed Data Networks
- Telecommunications
- Local Area Networks (LAN)

Features

- In-line Configuration
- All Fiber Construction (no air gap utilized)
- Single Window or Dual Window Capability
- Fixed Attenuation Values from 1 to 40 dB
- Environmentally Stable
- Telcordia Compliant for Endface Geometry

MPS-2150

Multimode, Inline Optical Attenuator

Specifications

Parameter	Central Wavelength
Attenuation:	1 to 40 dB, $\pm 5\%$
Operating Wavelength:	850, 1300, 1310 or 1550 nm ± 50 nm
Back Reflection:	≤ -65 dB
Operating Temperature:	-40° C to $+85^\circ$ C
Fiber Type:	Multimode: 50/125 or 62.5/125
Fiber Pigtail Type:	250 μ m Bare, 900 μ m

Part Number Generator

