

MP-8000-22 Series Unamplified Microwave Fiber Optic Transmitter (TX)

22 GHz Unamplified Microwave Fiber Optic Transmitter



Broadband Microwave Analog Fiber Optic Transmitter Modules Provides >100km Transport Capability.

The MP-8000-22-UTX RF/Fiber Optic Transmitter modules are designed to provide electrical-to-optical (E/O) conversion of broadband RF signals over a frequency range of 10 MHz to 22 GHz.

The utilization of the MP-8000-22-UTX, in conjunction with the appropriate MP-8000-RX-00 RF/Fiber Optic Receiver, forms a broadband link capable of supporting the transmission of RF signals over singlemode optical fiber for use in a wide array of scientific and communication applications. The link applications include antenna remoting, SATCOM, RF delay lines, telemetry tracking, and point-to-point RF transmission.

The transmitter utilizes a high efficiency Mach-Zehnder Lithium Niobate (LiNbO₃) electro optic modulator, coupled with a high power Distributed Feedback (DFB) laser diode centered at 1550 nm or on customer specified ITU wavelengths. Use of a X-cut modulator ensures near zero chirp characteristics that enables >100km fiber lengths and predictable dispersion control implementations. The laser temperature stability is microprocessor controlled using a thermal electric cooler and an advanced ditherless bias control loop. These features, coupled with the MP-8000-RX-00's companion Photonic Receiver's incorporation of a high-speed, low distortion PIN photodiode detector, assures low noise and high dynamic range link performance over varying frequency, temperature, and optical loss budgets.

The MP-8000-22-UTX series Transmitter application modules have advanced Built-In-Test (BIT) diagnostic capabilities which provides remote status and monitoring of critical parameters such as transmitted optical power, system power, modulator bias, temperature, amplifier current, attenuator setting and a summary alarm status.


Information: Call us toll-free at 888-868-8967 or email info@b2bphotonics.com

Applications:

- SATCOM Interfacility Links
- Microwave Antenna Remoting
- Electronic Counter Measure Systems
- Test and Measurement Applications
- Wideband Delay Line Applications
- Phased array Antenna Systems
- Secure Communication Systems

Features:

- 10 MHz to 22 GHz Bandwidth
- X-Cut LiNbO₃ Modulator
- Extended Operating Temperature
- High Optical Output +20 dBm
- High Speed, Noise free Bias Loop
- Single Fiber DWDM Operation
- Small Form Factor Flange Mount
- Hot Swappable, Plug-In Module
- Compatible with MPS-1911 and MPS-1914 Rack Chassis Systems

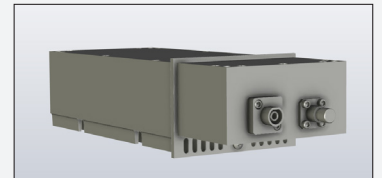

1911 Plug-In Style Module



1914 Plug-In Style Module

Microwave Photonic Systems, Inc.

1155 Phoenixville Pike, Unit 106, West Chester, PA 19380, Toll-Free: 888-868-8967

Phone: 610-344-7676, Fax: 610-344-7110, E-mail: info@b2bphotonics.com, Internet: b2bphotonics.com

MP-8000-22 Series Unamplified Microwave Fiber Optic Transmitter (TX)

Unamplified 22 GHz Fiber Optic Transmitter MP-8000-22-UTX

Specifications

Optical:

Operational Wavelength	1555 +/- 5 nm or Customer Specified ITU Grid Channel
Optical Output Power (nom)	10mW / 20mW
Optical Output Fiber Type	Single Mode SMF-28
Optical Connector Type	FC/APC, SC/APC, E2000, PC/APC, AVIM, Others
Optical Back Reflections	-55 dB

RF:

Frequency Response	10 MHz to 22 GHz
RF Input Impedance (nom)	50 Ohms
RF VSWR Input (max)	2:1
RF Input Connector Type	2.92 mm (K) female
1 dB Input Comp. Level (min)	+15.0 dBm ⁽¹⁾
Input IIP3	+25.0 dBm ⁽¹⁾
RF Link Gain (min)	-30 dB ⁽¹⁾ / -23 dB ⁽²⁾
RF Link Gain Flatness (typ)	6 dB over Full Operating Bandwidth ⁽¹⁾ (Gain Equalized versions Available) ± 1.0 dB over any 500MHz Bandwidth ⁽¹⁾
RF Link Noise Figure (max)	40.0 dB ⁽¹⁾
Spur Free Dynamic Range	104 dB Hz ^{2/3} ⁽¹⁾ / 107 dB Hz ^{2/3} ⁽²⁾
RF Input Power (max)	+25.0 dBm, non-damage

General

Power Supply	+8.0 to + 24 VDC, 9 Watts (max)
Operating Temperature (std)	-20°C to +50°C
Operating Temperature (extended)	-40°C to +70°C
Storage Temperature	-45°C to +85°C
Operating Humidity	95% Non-condensing
Storage Altitude	50,000 ft
Local Alarm	LED: Bit Fault & Optical Power Failure (Plug-In Version Only)
Remote Alarms	Open Collector and Serial Interface
Dimensions:	
Flange Mount TX	6.5" x 2.5" x 1.25"
Chassis Mount	MPS-1911 or MPS-1914 Compatible


Note (1) : Performance stated with 10mW dBo RX Optical Input applied to MP-8000-RX-00 Receiver Module

Note (2) : Performance stated with 20mW dBo RX Optical Input applied to MP-8000-RX-00 Receiver Module

MP-8000-22 Series Unamplified Microwave Fiber Optic Transmitter (TX)

Unamplified 22 GHz Fiber Optic Transmitter MP-8000-22-UTX

Transmitter Part Number Generator

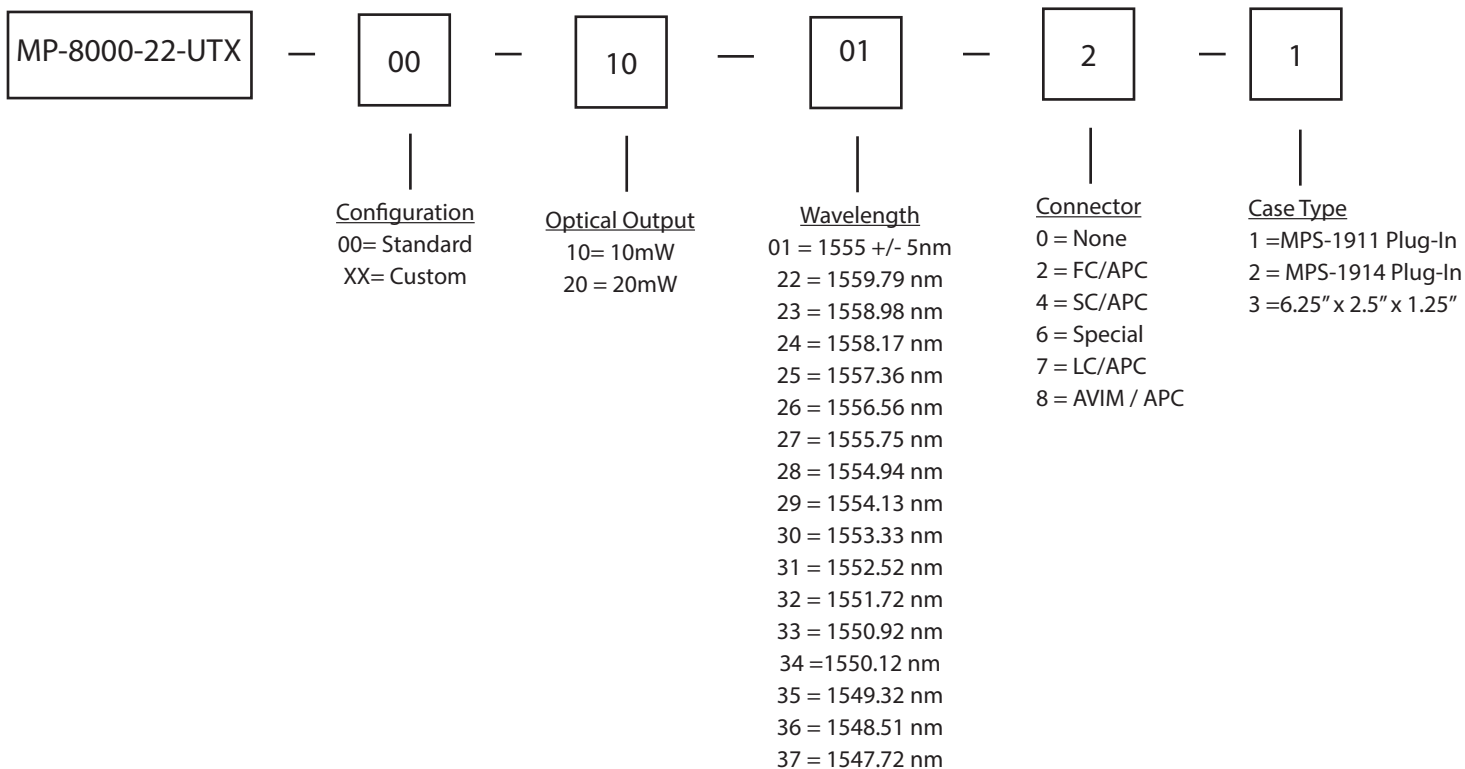

Note (1) : Other Frequency Bandwidths Available on Request