

MP-8000-40 Series Unamplified Microwave Fiber Optic Transmitter

40 GHz Unamplified Microwave Fiber Optic Link Modules



Broadband Microwave Analog Fiber Optic Transmitter Modules Provides >100km Transport Capability.

The MP-8000-40-ATX RF/Fiber Optic Transmitter modules are designed to provide electrical-to-optical (E/O) conversion of broadband RF signals over a frequency range of 10 MHz to 40 GHz.

The utilization of the MP-8000-40-ATX, in conjunction with the appropriate MP-8000-RX-02 RF/Fiber Optic Receiver, forms a broadband link capable of supporting the transmission of RF signals over singlemode optical fiber for use in a wide array of scientific and communication applications. The link applications include antenna remoting, SATCOM, RF delay lines, telemetry tracking, and point-to-point RF transmission.

The transmitter utilizes a high efficiency Mach-Zehnder Lithium Niobate (LiNbO3) electro optic modulator, coupled with a high power Distributed Feedback (DFB) laser diode centered at 1550 nm or on customer specified ITU wavelengths. Use of a X-cut modulator ensures near zero chirp characteristics that enables >100km fiber lengths and predictable dispersion control implementations. The laser temperature stability is microprocessor controlled using a thermal electric cooler and an advanced ditherless bias control loop. These features, coupled with the MP-8000-RX-02's companion Photonic Receiver's incorporation of a high-speed, low distortion PIN photodiode detector, assures low noise and high dynamic range link performance over varying frequency, temperature, and optical loss budgets.

The MP-8000-40-UTX series Transmitter application modules have advanced Built-In-Test (BIT) diagnostic capabilities which provides remote status and monitoring of critical parameters such as transmitted optical power, system power, modulator bias, temperature, amplifier current, attenuator setting and a summary alarm status.

Information: Call us toll-free at 888-868-8967 or email info@b2bphotonics.com

Applications:

- SATCOM Interfacility Links
- Microwave Antenna Remoting
- Electronic Counter Measure Systems
- Test and Measurement Applications
- Wideband Delay Line Applications
- Phased array Antenna Systems
- Secure Communication Systems

Features:

- 10 MHz to 40 GHz Bandwidth
- X-Cut LiNbO3 Modulator
- Extended Operating Temperature
- High Optical Output +20 mW
- High Speed, Noise free, Bias Loop
- Single Fiber DWDM Operation
- Small Form Factor Flange Mount
- Hot Swappable, Plug-In Module
- Compatible with MPS-1911 and MPS-1914 Rack Chassis Systems



1914 Plug-In Style Module

Microwave Photonic Systems, Inc.

1155 Phoenixville Pike, Unit 106, West Chester, PA 19380, Toll-Free: 888-868-8967

Phone: 610-344-7676, Fax: 610-344-7110, E-mail: info@b2bphotonics.com, Internet: b2bphotonics.com

Unamplified 40 GHz Fiber Optic Transmitter MP-8000-40-UTX

Specifications

Optical:

Operational Wavelength	1555 +/- 5 nm or Customer Specified ITU Grid Channel
Optical Output Power (nom)	10mW, 20mW
Optical Fiber Type	Single Mode SMF-28
Optical Connector Type	FC/APC, SC/APC, E2000, PC/APC, AVIM, Others
Optical Back Reflections	-55 dB

RF:

Frequency Response	10 MHz to 40 GHz
RF Input Impedance (nom)	50 Ohms
VSWR Input (max)	2.5:1
RF Input Connector	2.92 mm (K) female
1 dB Input Comp. Level (nom)	+17.0 dBm ⁽¹⁾
Input IIP3 (typ)	+29.0 dBm ⁽¹⁾
RF Link Gain (nom)	-28 dB ⁽¹⁾
RF Link Gain Flatness (typ)	10 dB over Full Operating Bandwidth ⁽¹⁾ (Gain Equalized versions Available)
RF Link Noise Figure (typ)	37.0 dB ⁽¹⁾
Spur Free Dynamic Range(typ)	109 dB Hz ^{2/3} ⁽¹⁾
RF Input Power (max)	+25.0 dBm, non-damage

General

Power Supply	+8.0 to + 24 VDC, 9 Watts (max)
Operating Temperature (std)	-20°C to +50°C
Operating Temperature (extended)	-40°C to +70°C
Storage Temperature	-45°C to +85°C
Operating Humidity	95% Non-condensing
Storage Altitude	50,000 ft
Local Alarm	LED: Bit Fault & Optical Power Failure (Plug-In Version Only)
Remote Alarms	Open Collector and Serial Interface
Dimensions:	
Flange Mount TX	6.5" x 2.5" x 1.25"
Chassis Mount	MPS-1911 or MPS-1914 Compatible


Note (1) : Performance stated @ 40GHz with 10mW dBo RX Optical Input applied to MP-8000-RX-02 Receiver Module

Note (2) : Performance stated @ 40GHz with 20mW dBo RX Optical Input applied to MP-8000-RX-02 Receiver Module

MP-8000-40 Series Unamplified Microwave Fiber Optic Transmitter

Unamplified 40 GHz Fiber Optic Transmitter MP-8000-40-UTX

Transmitter Part Number Generator

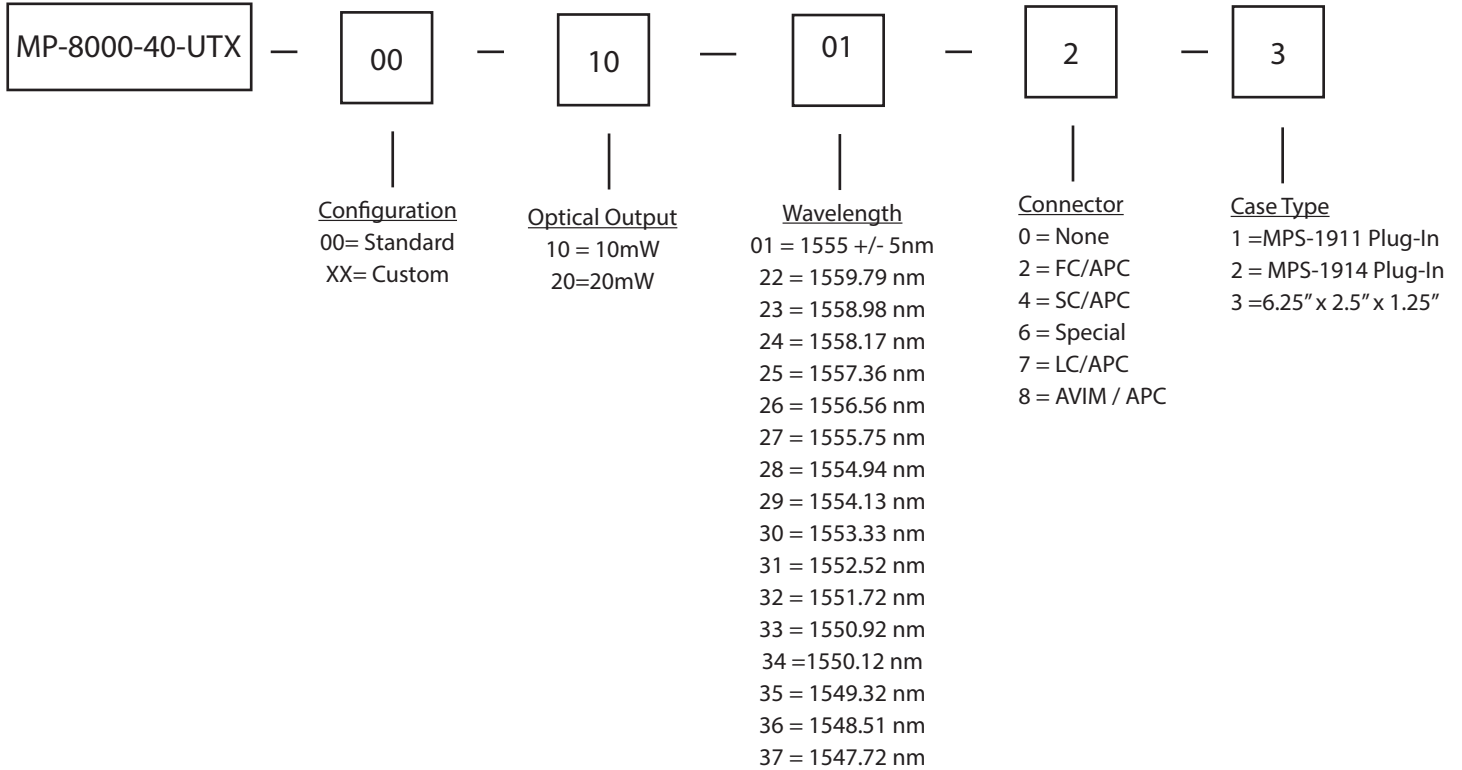


Note (1) : Other Frequency Bandwidths Available on Request

MP-8000-40 Series Unamplified Microwave Fiber Optic Transmitter

Unamplified 40 GHz Fiber Optic Transmitter MP-8000-40-UTX

Transmitter Outline Drawing

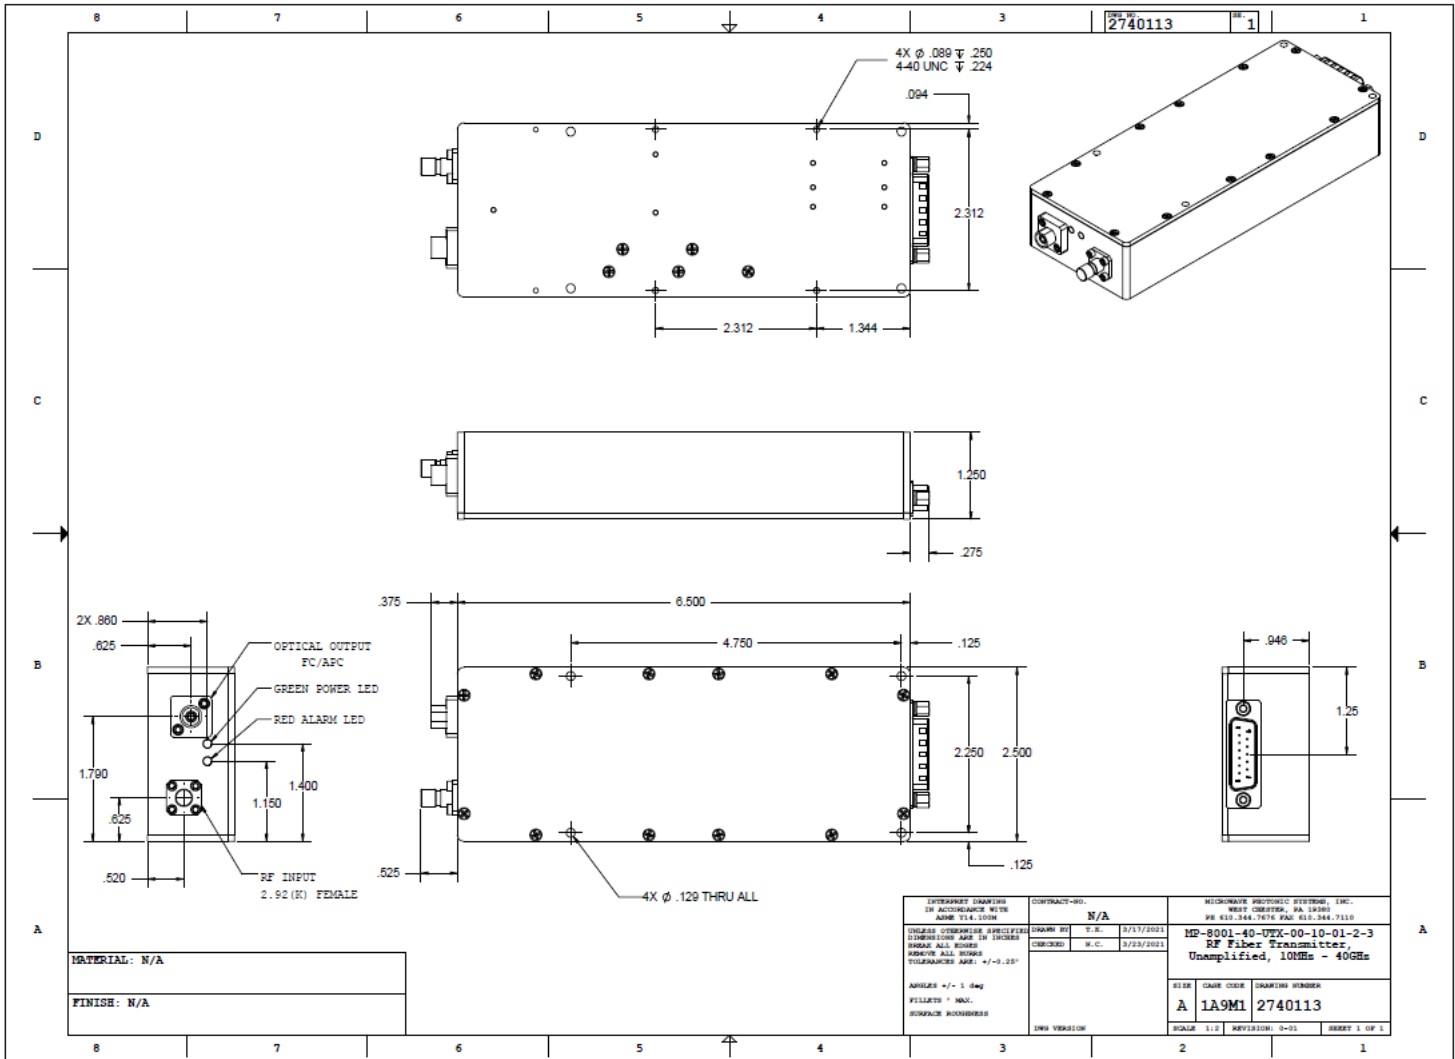

Microwave Photonic Systems, Inc.
 1155 Phoenixville Pike, Unit 106, West Chester, PA 19380, Toll-Free: 888-868-8967
 Phone: 610-344-7676, Fax: 610-344-7110, E-mail: info@b2bphotronics.com, Internet: b2bphotronics.com